




# LA1T

## ELECTROMAGNETIC LEVEL SWITCH SINGLE CONTACT WITH THERMOSTAT

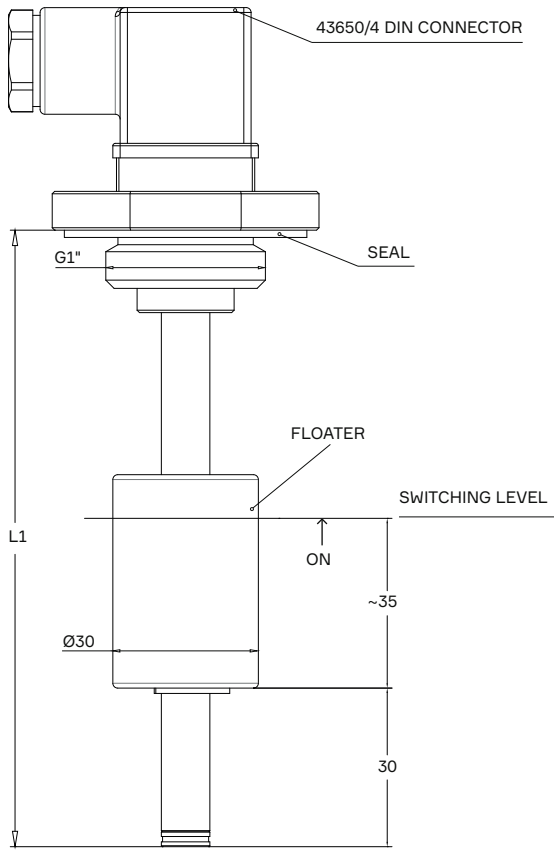

Connection holes	Electrical features	Technical features	Materials:
<ul style="list-style-type: none"> <li>• Three holes flange - 120°</li> <li>• Two holes flange - 180°</li> <li>• 1" BSPP</li> </ul> <p>Three types of connections in a single execution.</p>	<ul style="list-style-type: none"> <li>• Electrical connection in accordance with DIN 43650/A</li> <li>• Electrical protection in accordance with DIN 40050 - IP 65</li> <li>• Maximum electrical load NO / NC: 30V AC / DC - 0.25A</li> <li>• Other electrical features on request.</li> </ul>	<ul style="list-style-type: none"> <li>• Max pressure: 5 bar</li> <li>• Max fluid viscosity: 150 cSt</li> <li>• Fluid temperature: -10 ÷ 90 °C</li> </ul>	<ul style="list-style-type: none"> <li>• Rod: Stainless Steel 316</li> <li>• Floater: PA66</li> <li>• Housing: Anodized Aluminum</li> </ul>

### Select specifications for product coding

1.	<b>Rod Length L1 (mm)</b>	015 150	020 200	025 250	030 300	035 350	040 400	045 450	050 500	055 550	060 600
2.	<b>Floater electrical configuration</b>									A Normally Open	C Normally Closed
3.	<b>Switching Temperature (°C)</b>				030 30	040 40	050 50	060 60	070 70	080 80	090 90
4.	<b>Thermostat electrical configuration</b>									A Normally Open	C Normally Closed
5.	<b>Customizations</b>									.00 Standard	.XX Customized product

LA1T

1.	2.	3.	4.	5.
----	----	----	----	----